



L801 Pro Printer


Start

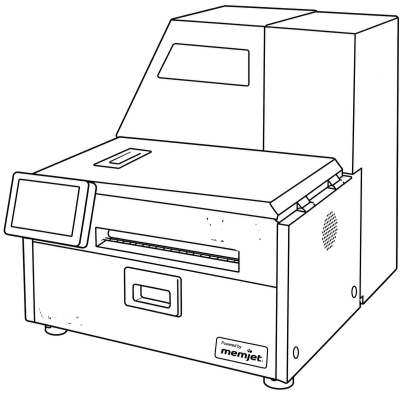

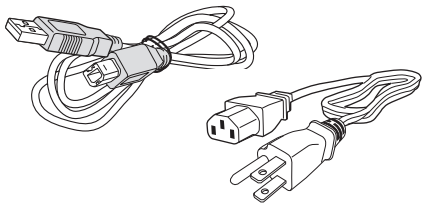









Please download the latest printer driver from afinialabel.com to a thumb drive or into your laptop/PC connected to your printer.


1 Remove tape and packing materials


a Remove tapes

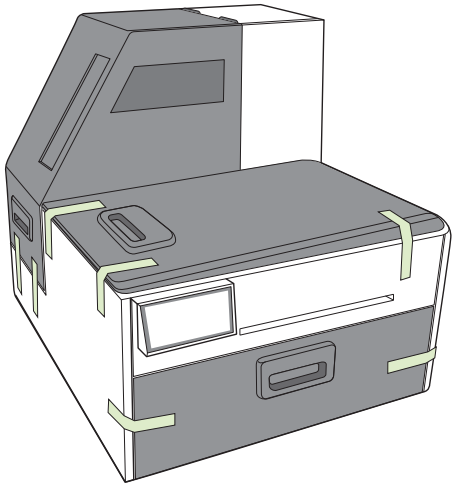

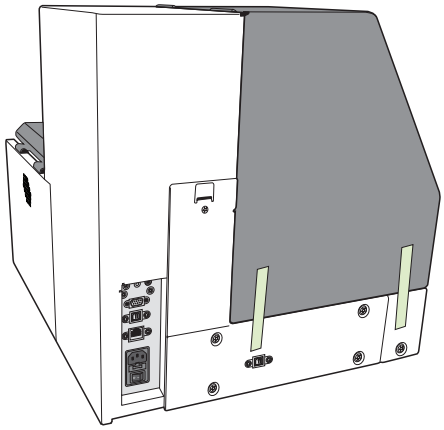



b Remove tapes and foam

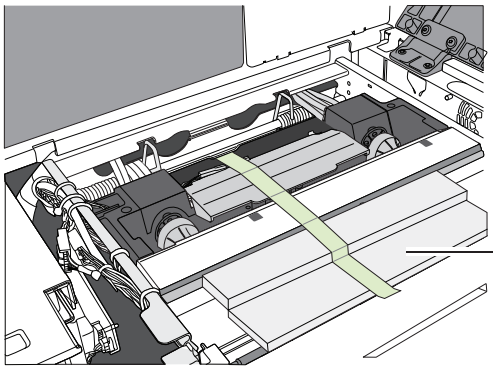

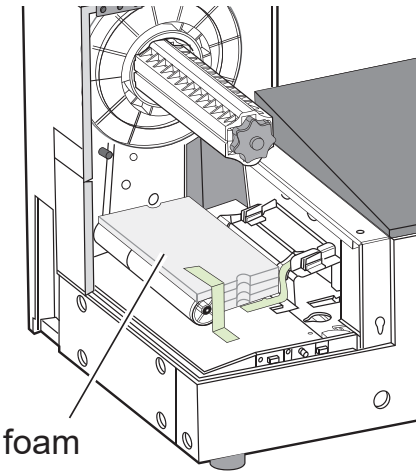


c Remove cardboard

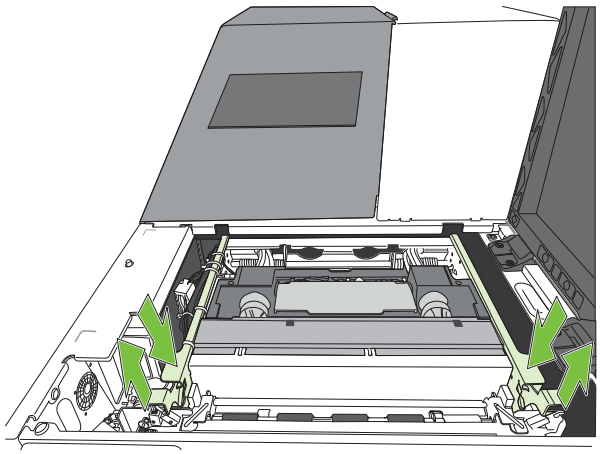

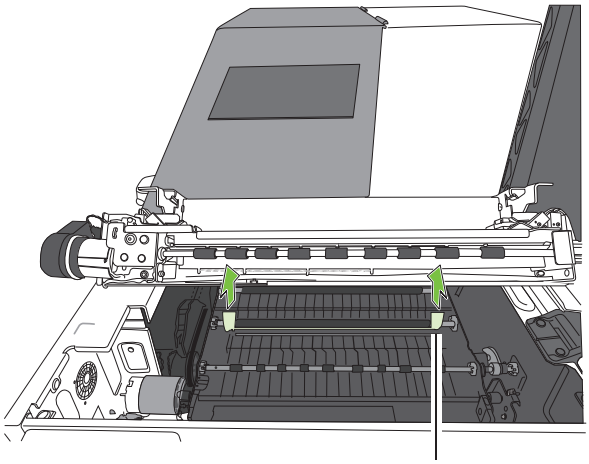


pull tabs


cardboard

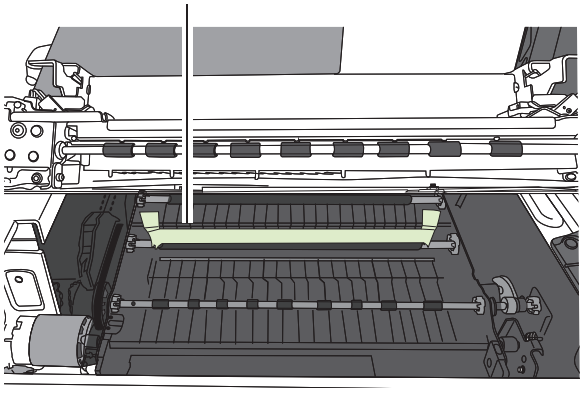

2 Connect power

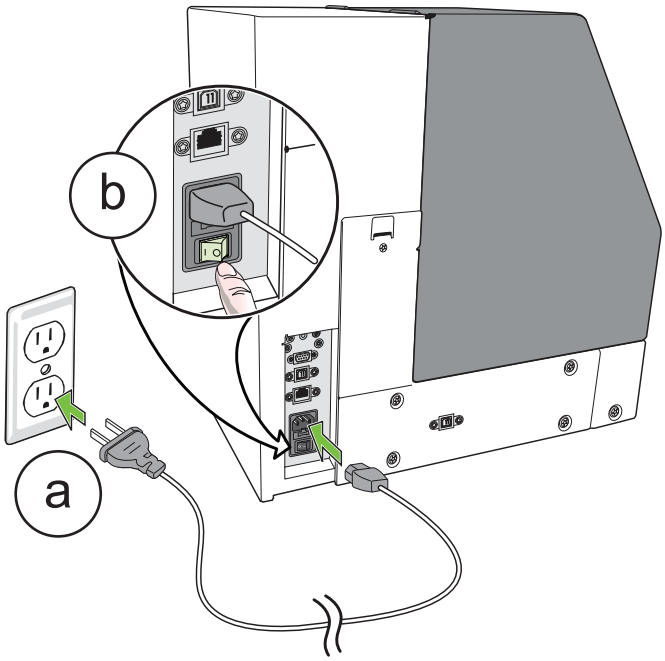


c Press and hold for 3 seconds

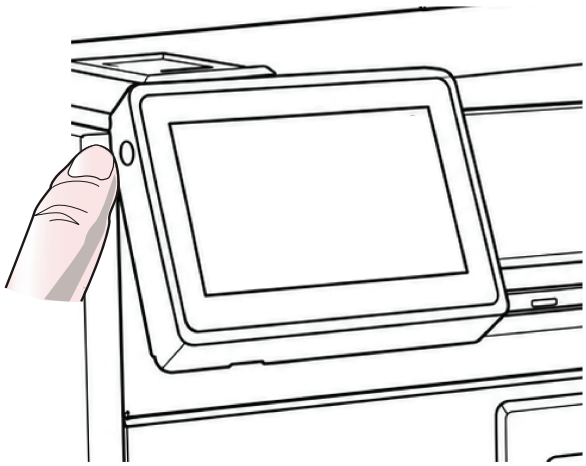

Powered by memjet

Choose display language


a

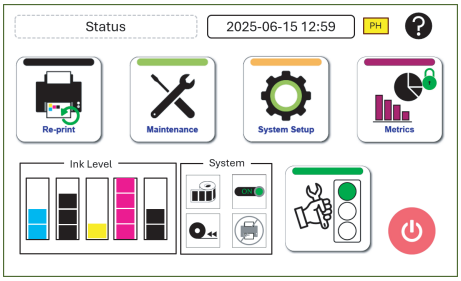

b Click on the icon




c

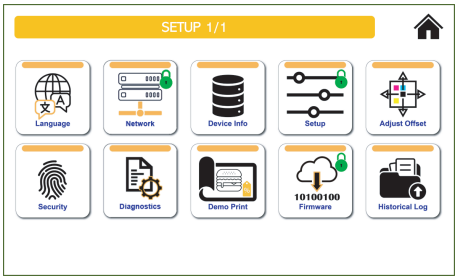


d Click on the icon




e Select the language

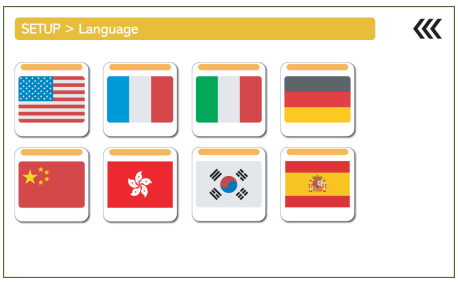


3 Install ink cartridges




a

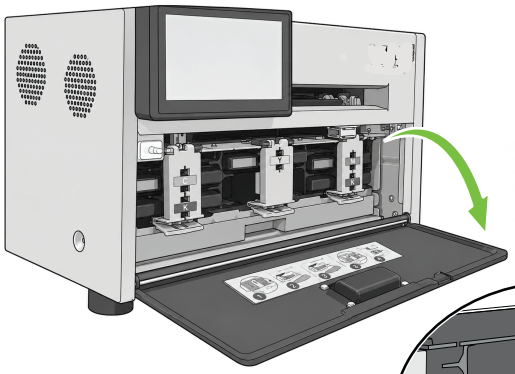


b




c

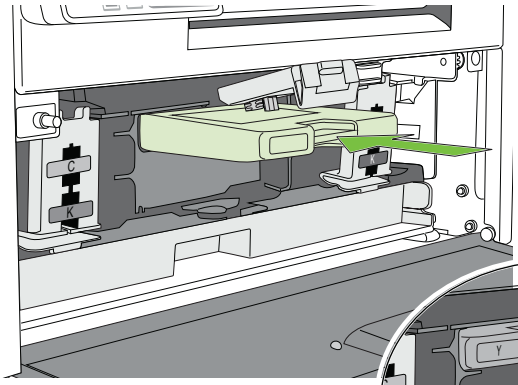

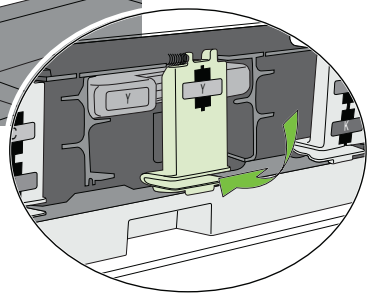


d

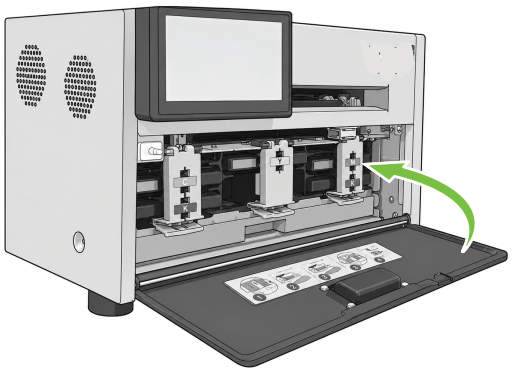


4 Install printhead

a

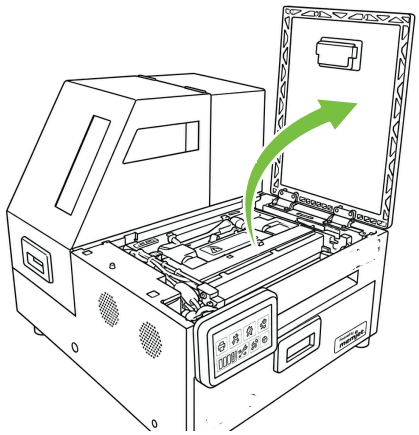


b

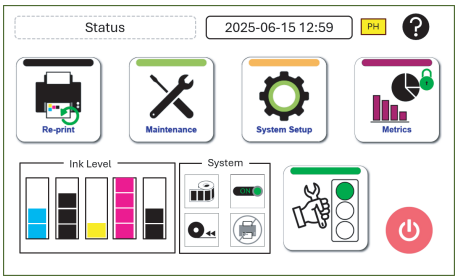

c Click on the icon



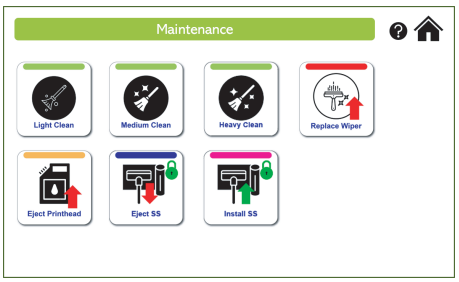


d Click on the icon




Wait for printhead latch to be released

e Open printhead latch fully

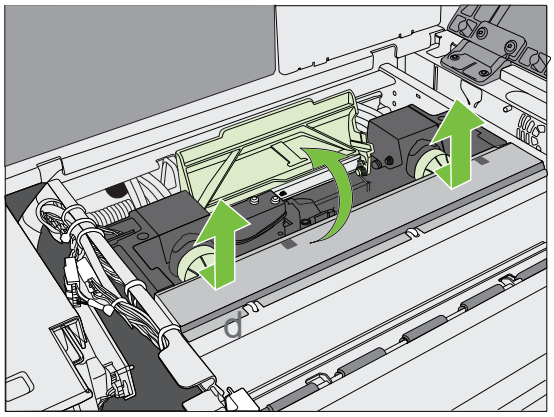


f Remove caps




g Remove printhead from packaging


ink couplings

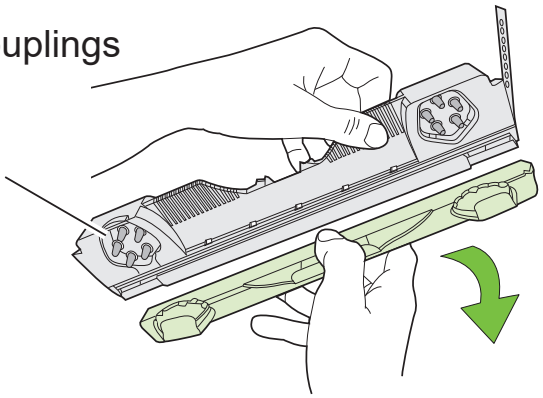


NOTE: Keep the orange cover.
You will need it to cap the printhead if it is removed from the printer.


Do not touch the ink couplings, electrical contacts, or nozzles.

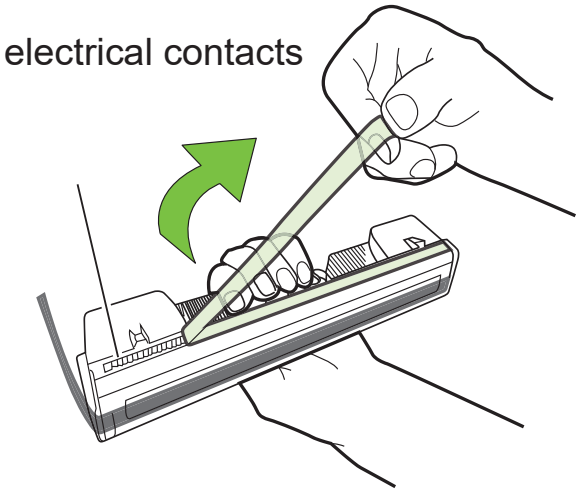

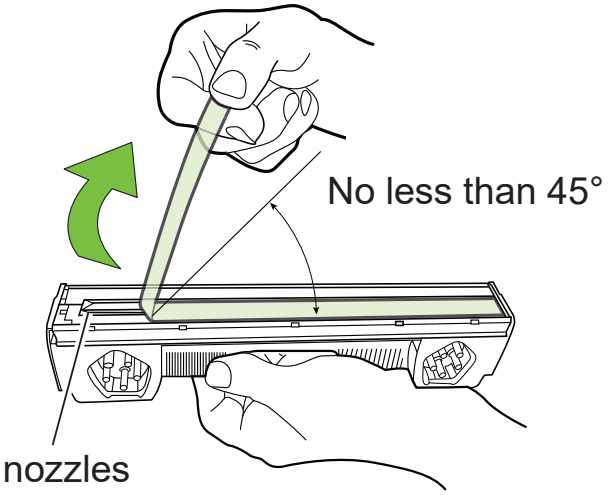


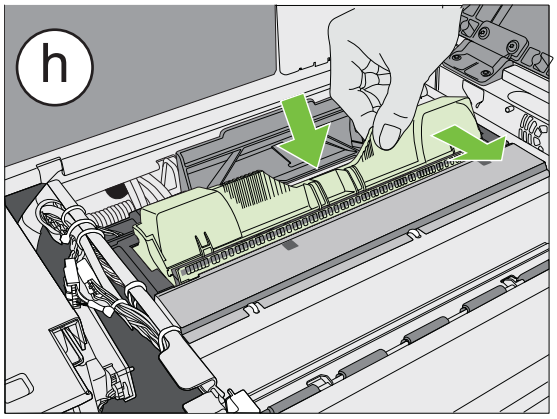

5 Load media /

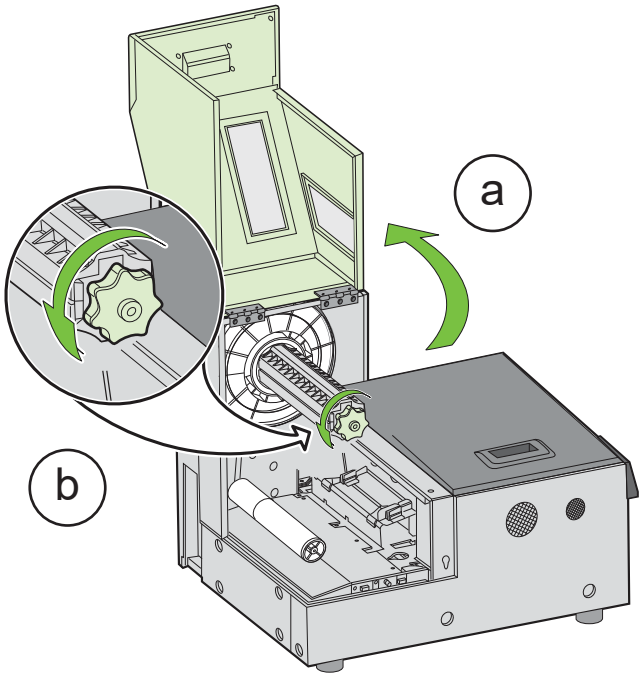


i

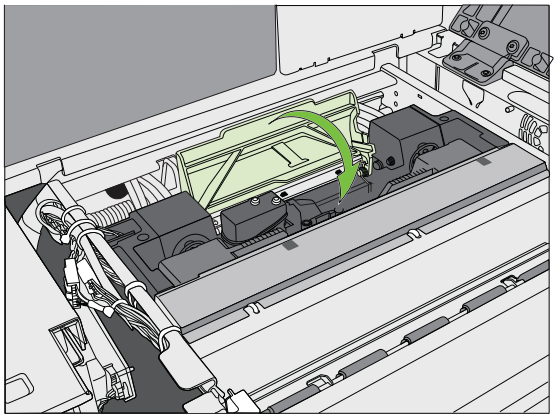


Check that ink is flowing through the tubes on both sides of the printhead.

j

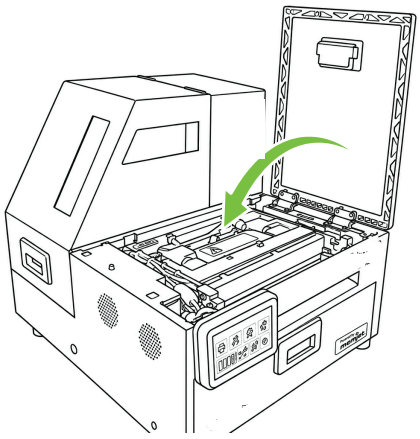


c

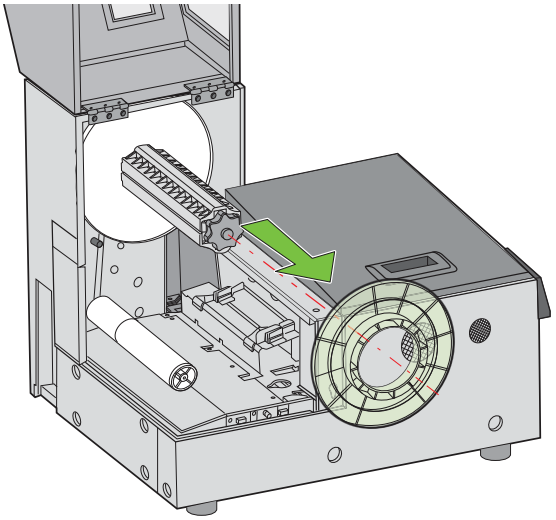


Push media roll against inner guide.

f

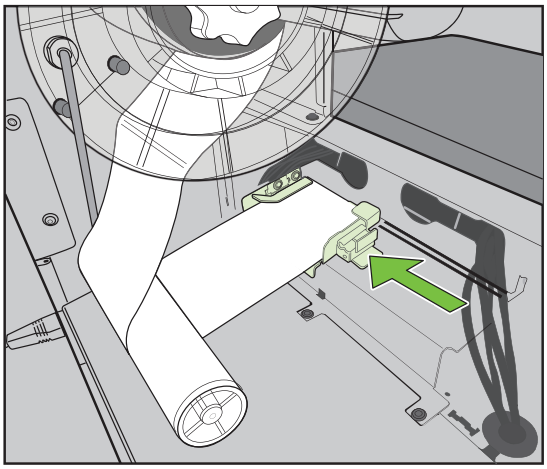


Insert media till it stops.
Wait for printer to load media

d

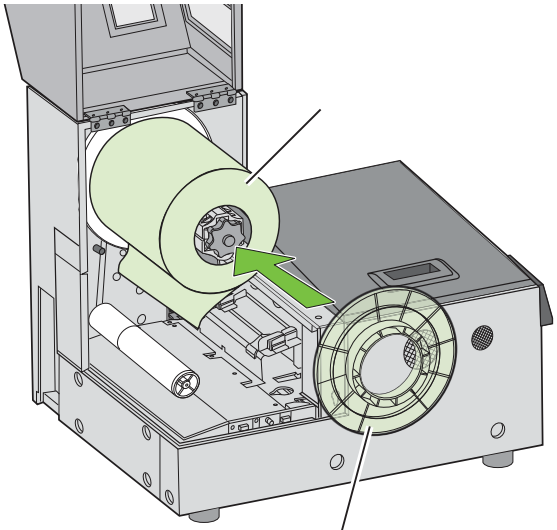


Flat side against media roll

g

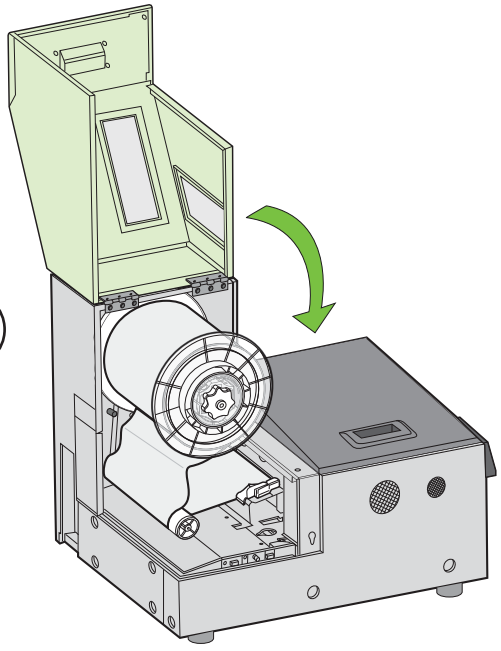

e

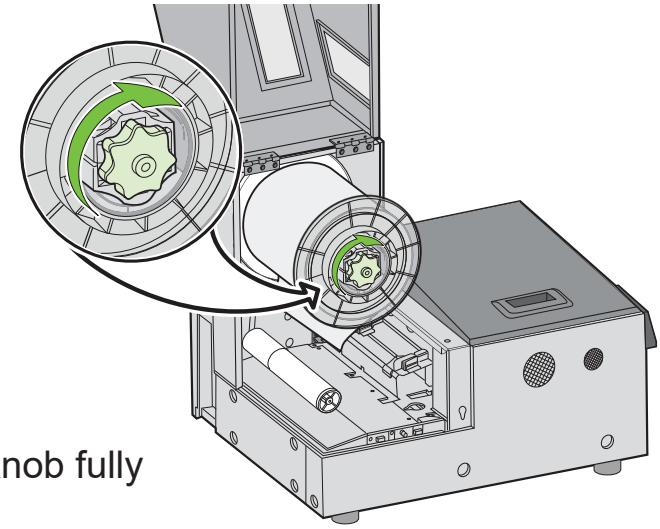


Tighten knob fully

6 Print test label


Load 6” x 4” or larger labels (with inter-label gap or continuous)*

a

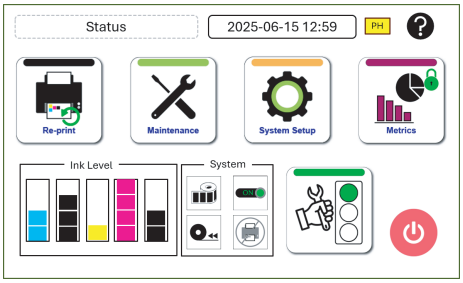

b Click on the icon




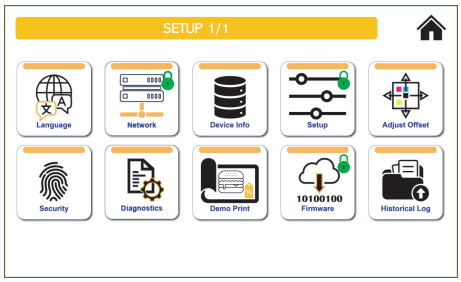


c Click on the icon



Print the sample PQ plot

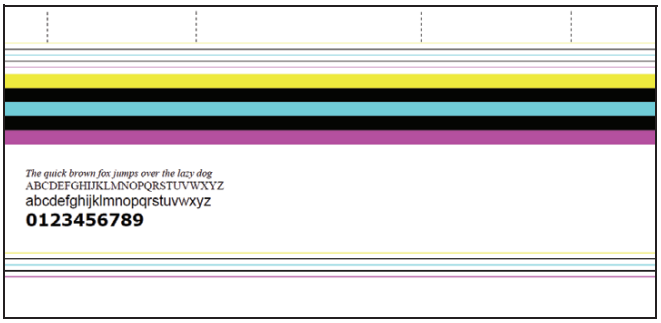


* If using continuous stock, set Media Layout to Continuous at the HOME page of the touchscreen




7 Install printer driver

To connect printer to computer


a




b

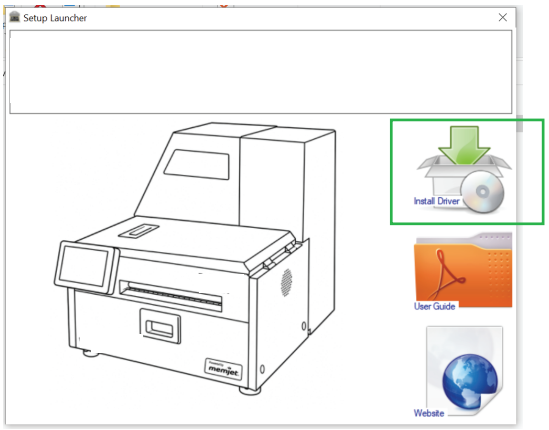

c

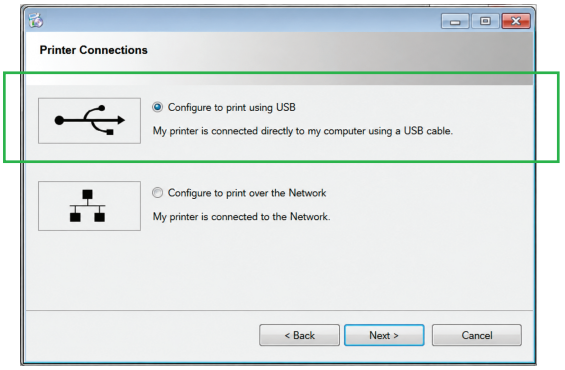


d Connect USB cable when prompted

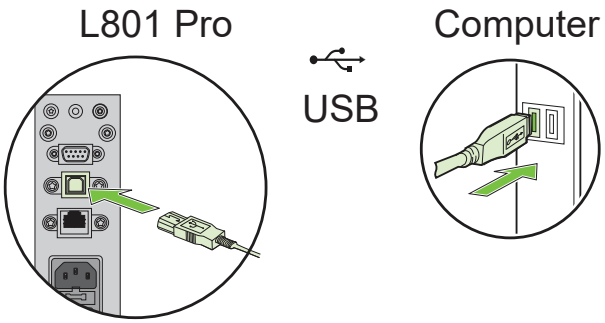

To connect printer to network


a

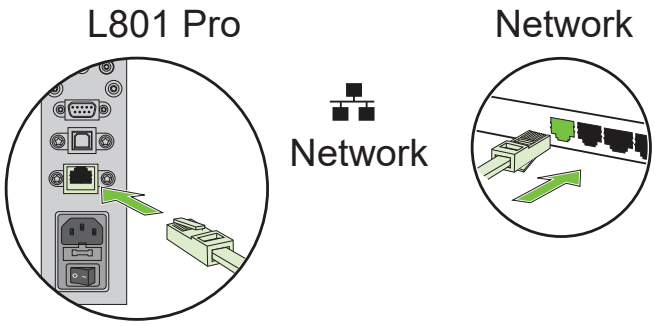


b




c

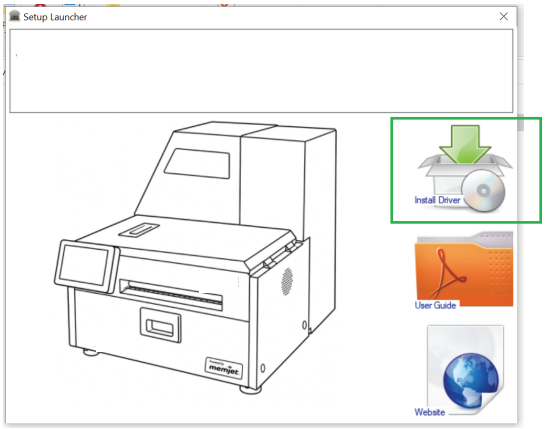


d

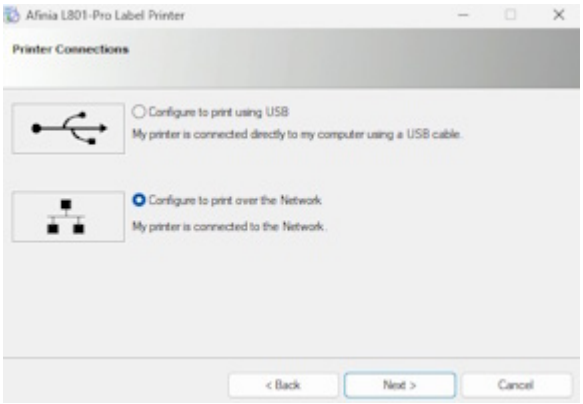

Select Network and click Next.

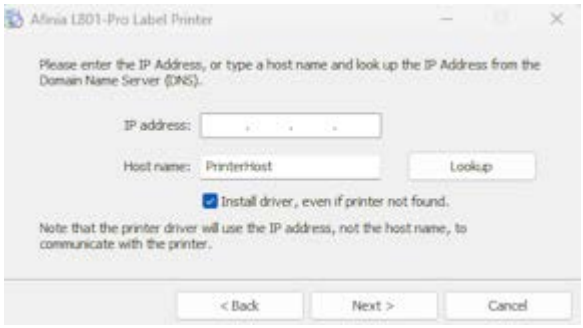

On the printer display, select System Setup and then Device Info. Enter the IP address listed in this field.

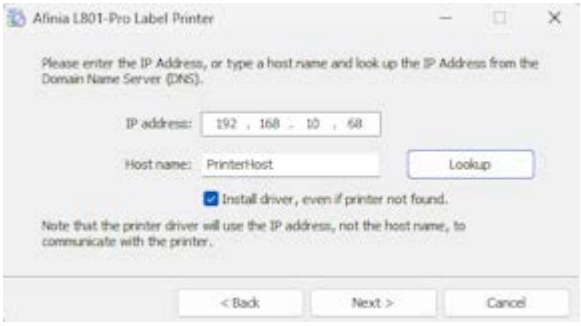

Once the IP address field is filled in, click Next.

For more information, refer to the printer User Guide